

P4661 CEN 3 Padlock



Application:


Suitable for universal indoor and outdoor use. High security applications including remote sites within the utility and infrastructure sectors, security and access control on control panels and enclosures.

Features:

- 46 mm brass bodied padlock with stainless steel shackle
- Electroless nickel plated
- 8 mm diameter open shackle
- Spring loaded, self-locking and manual locking available
- Shackles available with 25, 60 & 110 mm clearance
- EN 12320 Grade: 3 (CEN 3)
- Double locking hardened stainless steel ball bearing
- Uses a snowman cylinder
- Padlock Retention chain available

Available Systems:

- quattro plus
- expert & expert plus
- pextra & pextra+

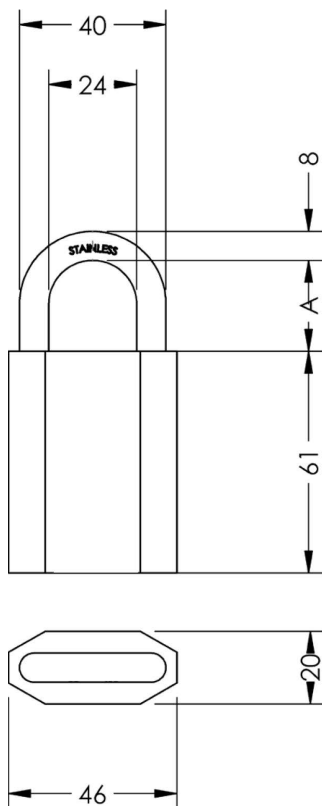

A= 25 / 60 or 110 mm

dormakaba UK & Ireland
Lower Moor Way
Tiverton
Devon
EX16 6SS

T: +44 (0)870 000 5625
E: info.gb@dormakaba.com